CIO-SC2-10000

3in1チャージャー

SuperMobileCharger

取 扱 説 明 書

---

1. はじめに

お買い上げありがとうございます。ご使用の前に「取扱説明書」をよくお読みの上、正しくお使いください。

もくじ

1. はじめに ………… 2
2. 注意事項 ………… 3-5
3. 付属品 ………… 6
4. 仕様 ………… 6
5. 対応急速充電規格 ………… 6
6. 各部名称 ………… 7
7. 使用方法 ………… 8-10
8. 製品保証 ………… 11-12

2.注意事項

⚠ **警告** 死亡や重傷に結びつく恐れがある内容です。

⚠ **注意** 重傷を負う可能性及び、物的損害に結びつく恐れがある内容です。

⚠ 警告

- ⃠ 本製品が異音や異常な発熱、異臭、異物が入った場合は直ちに使用を中止してください。
- ⃠ 分解及び改造は絶対に行わないでください。火災·感電·怪我の原因となります。
- ⃠ お子様だけでご使用、幼児の手の届くところで使用しないでください。
- ⃠ 本製品を水につけたり、濡らさないようにしてください。また濡れた手で電源プラグに触れないでください。発熱·発火·火災·感電·破裂などの原因となります。
- ⃠ 高温となる場所での使用、放置、保管は避けてください。また火の中へ投入しないでください。
- ⃠ 本製品を落としたり、重いものを上にのせたり、衝撃をあたえないでください。感電·故障·怪我の原因となります。
- ⃠ 電源プラグは、家庭用コンセントに奥までしっかりと差し込みご使用ください。差し込みが不十分だと、接触不良などによって火災や感電の原因となります。
- ⃠ タコ足配線でのご使用はおやめください。火災の原因となります。
- ⃠ 本製品は熱を発する装置から離して使用してください。

⚠ 注意

- ❗ 本来の用途以外に使用しないでください。
- ❗ 本製品を引火性のある油、化学薬品、可燃性のものの近くで使用しないでください。
- ❗ 本製品は防水構造ではありません、水などの液体がかからない場所での使用·保存をしてください。
- ❗ 本製品を使用するときは、USBコネクタの形状を確認し正しい向き、方向で挿入してください。無理な挿入は故障·怪我の原因となります。
- ❗ 本製品にデバイス機器を接続する場合は、必ずデバイス機器の注意事項·マニュアルに従って正しくご使用ください。
- ❗ 本製品を充電中、使用中は本製品が熱くなる場合がございますので取り扱いにご注意ください。またデバイスが満充電、本製品が満蓄電に近づくにつれ、通常の温度に戻ります。
- ❗ PowerDelivery(PD)充電を行う際は、PD対応デバイス機器に対し、PD対応ケーブルをご使用いただく必要がございます。
- ❗ QuickCharge3.0(QC3.0)充電を行う際は、QC3.0対応デバイス機器に対し、QC3.0対応ケーブルをご使用いただく必要がございます。
- ❗ 本製品を長時間使用しないときは、本製品を家庭用コンセントから抜いてください。故障の原因となります。
- ❗ 本製品を使用して接続された機器の破損·損傷·故障およびデータの消失に関して弊社では一切の責任を負いかねます。あらかじめご了承ください。

⚠ 注意

- ❗ ワイヤレス充電機能を使用するときは、ワイヤレス充電対応に対応したデバイスか確認した上でご使用ください。
- ❗ ワイヤレス充電機能を使用するときは、金属製の保護カバーなどを装着したままご使用にならないでください。異物検知機能が働き正しく充電できません。
- ❗ ワイヤレス充電機能を使用するときは本製品が熱くなる場合がありますが、異常ではありません。
- ❗ 本製品から液漏れがある場合は、直ちに使用を中止してください。
- ❗ 長時間使用しない場合は、製品寿命を保つため約3か月に1度の頻度にて充電·放電を行ってください。
- ❗ 本製品から液漏れがある場合は、直ちに使用を中止してください。
- ❗ 本製品を破棄する場合、各自治体の指示に従って廃棄してください。
- ❗ 製品仕様は改善のため予告なく変更する場合があります。そのため説明書記載の内容と異なる場合があります。

3.付属品

■本製品 ■取扱説明書

4.仕様

Model:	CIO-SC2-10000
Input :	AC 100-240V 50/60Hz 0.5A
AC Charger:	5V⎓2.4A(12W)
Type-C 入出力(AC時):	5V⎓3A
(モバイルバッテリー時):	5V⎓3A 9V⎓2A 12V⎓1.5A
USB-A 出力(AC時):	5V⎓2.4A
(モバイルバッテリー時):	5V⎓2.4A 9V⎓2A 12V⎓1.5A
同時充電時: (USB-A/Type-C/qi)	合計15W
バッテリー容量:	10000mAh
qiワイヤレス充電(AC時):	5W
(モバイルバッテリー時):	5W/7.5W/10W/15W
製品サイズ:	約82×80×29mm
製品重量:	約245g
サイクル回数:	約500回

5.対応急速充電規格

PD3.0/PD2.0/QC4/QC3.0/QC2.0/FCP/PE2.0

6.各部名称



①qi充電LEDステータスランプ
②Type-C 入出力ポート
AC時:15W / モバイルバッテリー時:18W
③USB-A 出力ポート
AC時:12W / モバイルバッテリー時:18W
④数値残量表示LED
⑤電源ボタン(長押しで電源OFF)
⑥qi急速充電
AC時:5W / モバイルバッテリー時:最大15W
⑦ACプラグ入力

qi充電LEDステータスランプの状態について

■ワイヤレス充電待機モード:緑(点灯)
■ワイヤレス充電モード :赤(点灯)
■異物検知機能作動時 :赤(点滅)

7.使用方法

■本製品からスマートフォン/タブレットなどへの充電方法

モバイルバッテリーモードにて使用する場合

各ポートへケーブルを挿し込むことで充電が開始されます。
充電が始まらない場合は、電源ボタンを押していただくことで開始します。

※急速充電PowerDelivery(PD)充電及び、QuickCharge(QC)充電を行う際は、各急速充電規格に適合した充電ケーブルをご使用ください。

ACモードにて使用する場合

本製品をコンセントに接続し、各ポートへケーブルを挿し込むことで充電が開始されます。
デバイスへの充電中、電力の一部を本製品の蓄電に使用します。
本製品は蓄電時、数値残量表示LEDが残量を示しながら点滅します。

ワイヤレス充電器として使用する場合

電源ボタンを押し、電源を入れます(緑ランプ点灯)、((qi)) マークの上に、ワイヤレス対応デバイスを右図のように置くことでワイヤレス充電がはじまります（赤ランプ点灯に変わります）
ワイヤレス出力は5W～15Wまで対応します。

※ワイヤレス充電は本製品とデバイスの位置がズレると正しく充電されませんのでご注意ください。
※金属等の装飾があるスマートフォンケースなどを装着している場合、異物検知機能が動作し、qi充電LEDステータスランプが赤色に点滅します。

CIO製品 ワイヤレス充電(qi)対応デバイス一覧(サポートページ)
https://connectinternationalone.co.jp/news/cio_qi
上記サポートページにてワイヤレス充電の対応デバイスをご確認いただけます。

■本製品への蓄電方法

コンセントプラグによる蓄電

収納されているコンセントプラグを出し、左図のようにコンセントに接続することで、蓄電が開始されます。
蓄電中は数値残量表示LEDが残量を示しながら点滅します。

※電源をONにしたままコンセントに挿し込むと火花が散ることがありますが、既に通電しているために発生しており問題ございません。電源をOFFにしていただき、コンセントに挿し込むことで火花の発生を抑えることが可能です。

ACアダプタを経由してUSB Type-Cケーブルを本製品に挿していただくことで、本製品に蓄電が開始されます。
コンセントに接続する場合より早く蓄電※が可能となります。
※QCまたはPD対応の急速充電器およびケーブルをご使用の場合

8.製品保証

この度は株式会社CIOの製品をご購入いただき誠にありがとうございます。
商品に初期不良などの不具合がある場合、レビューの前にご連絡ください。
初期不良品として交換対応を実施させていただきます。
正しくご使用いただいた状態で保証期間内に発生した故障の場合も交換対応を実施させていただきます。

納品書兼保証書もしくは、販売店レシートが保証書の代わりとなりますので大切に保管してください。

※商品の保証は原則、交換対応とさせていただきます。返品·返金は承っておりませんのでご了承ください。

以下の場合は保証を実施いたしかねますので、ご了承ください。

1. 使用上の取り扱い不注意による事故(落下や水没など)。
2. 使用者による任意での内部改造による故障。
3. 火災・水害などによる故障。

8.製品保証

サポート窓口情報

メールアドレス：info@connectinternationalone.co.jp

保証書【CIO-SC2-10000】
販売店名

保証期間：6ヶ月
お買い上げ年月日： 年 月 日

\\ フォローしてね！ //

公式LINEアカウント

メリット01 LINEでカスタマーサポート

故障時や使い方が分からない場合など、チャットだからスムーズ！LINE で簡単にお問合せ OK！ 是非お気軽にご利用ください。

メリット02 LINE 限定クーポン

Amazon や楽天市場等でご利用いただける超お得なクーポンを LINE でいち早く公開！ SALE や新商品の情報も盛りだくさんです！

COUPON & SALE
お得なクーポン セール情報

QR コードで LINE の友だちを追加

QR コードをスマートフォンでスキャンしてください。

CIO-SC2-10000

3 in 1 Charger

SuperMobileCharger

USER MANUAL

CIO Co., Ltd.

Founded in 2017 in Osaka, Japan, CIO Co., Ltd. is a manufacturing and sales company focused on dealing with the latest gadgets and smartphone accessories. With the concept of "Delivering the latest, most exciting gadgets", the company offers its products through its e-commerce site and physical stores.

We always pay attention to the latest technology and continuously strive to develop products that increase the level of convenience for users. We offer high quality products in accordance with Japanese standards, but at the same time, we offer high cost performance as only an overseas manufacturer can.

It is our pleasure to provide convenient gadgets to our customers.

1. Introduction

Thank you for your purchase.
Please read the "USER MANUAL" carefully before use and use it correctly.

Contents

1. Introduction ………… 3
2. Precautions ………… 4-6
3. Accessories ………… 7
4. Specifications ………… 7
5. Supported Fast Charging Protocols ………… 7
6. Names of Each Part ………… 8
7. How to Use ………… 9-11
8. Warranty ………… 12-13

2.Precautions

⚠ **Warning** This is content that could lead to death or serious injury.

⚠ **Caution** There is a possibility of serious injury or damage to property.

⚠ Warning

- ⃠ Stop using this product immediately if it makes any noise, generates unusual heat, has an unusual odor, or contains a foreign object.
- ⃠ Do not disassemble or modify this product in any way. It may cause a fire, electric shock or injury.
- ⃠ Children should not use this product alone. Do not use this product within the reach of children.
- ⃠ Do not immerse the product in water or allow it to get wet.Do not touch the power plug with a wet hand. Otherwise, it may cause heat generation, fire, fire, electric shock, or explosion.
- ⃠ Please do not use, leave or store the product in a high temperature environment. Do not throw this product into fire.
- ⃠ Do not drop this product, place heavy objects on it, or give it a strong shock. Failure to do so may result in electric shock, malfunctions or injuries.
- ⃠ Plug the power cord into a household wall outlet when using. Failure to do so may result in fire or electric shock.
- ⃠ Do not use this product overloaded. It may result in fire.
- ⃠ This product should be used away from heat-generating equipment.

⚠ Caution

- ❗ Do not use this product for any purpose other than its intended use.
- ❗ Do not use this product near flammable oils, chemicals or flammable materials.This product is not waterproof.
- ❗ Use and store the product in a place where it will not be exposed to water or other liquids.
- ❗ When using this product, check the shape of the USB connector and insert it in the correct direction and orientation. Forced insertion may cause malfunction or injury.
- ❗ When connecting the device to this product, be sure to follow the precautions and manuals of the device to use it correctly.
- ❗ Please note that this product may become hot while charging or using it. Also, as the device is fully charged and this product approaches full charge, it will return to normal temperature.
- ❗ When using Power Delivery (PD) charging, it is necessary to use a PD-compatible cable with a PD-compatible device.
- ❗ When using Quick Charge 3.0 (QC3.0) charging, a QC3.0 cable must be used with a QC3.0 compatible device.

⚠ Caution

- ❗ Unplug this product from the power outlet when not using it for a long period of time. Failure to do so may result in a malfunction.
- ❗ We are not responsible for any damage or failure of the equipment connected to this product or loss of data. Please note in advance that we are not responsible for any damage to the equipment connected to this product.
- ❗ Please make sure that your device is compatible with wireless charging before using the wireless charging function.
- ❗ Do not use the wireless charging feature with a metal protective cover attached to the device. It will not be able to charge properly because of the foreign object detection function.
- ❗ When using the wireless charging function, this product may become hot, but this is not a malfunction.
- ❗ If any liquid leaks from this product, stop using it immediately.
- ❗ If you do not use the product for a long period of time, please charge and discharge the battery approximately once every three months to maintain the life of the product.
- ❗ If any liquid leaks from this product, stop using it immediately.
- ❗ When disposing of this product, dispose of it in accordance with the instructions of your local authorities.
- ❗ Product specifications are subject to change without notice for improvement. Therefore, they may differ from the description in the manual.

3. Accessories

■SuperMobileCharger (SC-2) ■User Manual

4. Specifications

Model:	CIO-SC2-10000
Input :	AC 100-240V 50/60Hz 0.5A
AC Charger:	5V⎓2.4A(12W)
USB-C Input/ Output (AC Adapter):	5V⎓3A
(Power Bank):	5V⎓3A 9V⎓2A 12V⎓1.5A
USB-A Output (AC Adapter):	5V⎓2.4A
(Power Bank):	5V⎓2.4A 9V⎓2A 12V⎓1.5A
Simultaneous Charging: (USB-A/USB-C/qi)	Total15W
Battery Capacity:	10000mAh
qi Charging(AC adapter):	5W
(Power bank):	5W/7.5W/10W/15W
Size:	Approx.82x80x29mm
Weight:	Approx.245g
Lifecycle:	Approx.500times

5. Supported Fast Charging Protocols

PD3.0/PD2.0/QC4/QC3.0/QC2.0/FCP/PE2.0

6. Names of Each Part

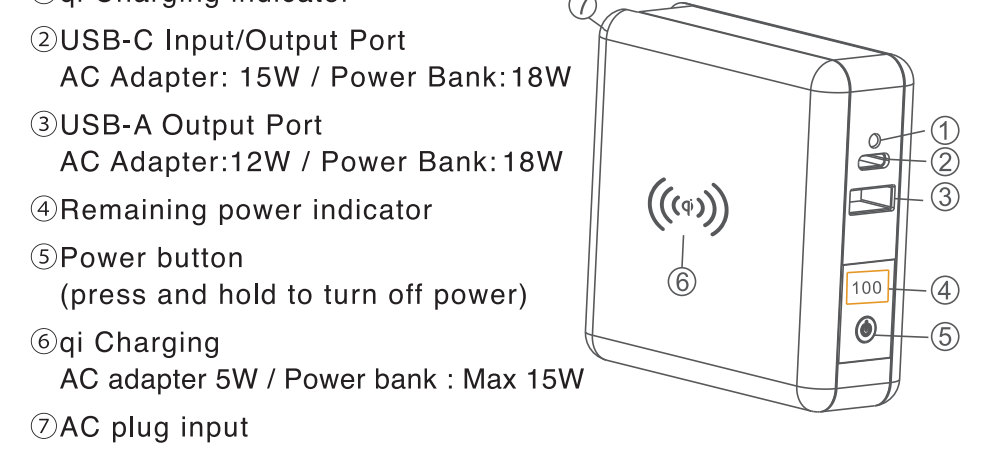

①qi Charging indicator
②USB-C Input/Output Port
AC Adapter: 15W / Power Bank: 18W
③USB-A Output Port
AC Adapter:12W / Power Bank: 18W
④Remaining power indicator
⑤Power button
(press and hold to turn off power)
⑥qi Charging
AC adapter 5W / Power bank : Max 15W
⑦AC plug input

Status of the qi charging LED indicator

■Wireless charging standby mode:Green (lit)
■Wireless charging mode:Red (lit)
■When the foreign object detection function is operating:Red (flashing)

7. How to Use

■How to charge a smartphone/tablet or other device from this product

Power Bank Mode

Plug the cable into each port and charging will start.
When charging does not start, please press the power button to start charging.

Note: Please use a charging cable compatible with each of the fast-charging protocols for PowerDelivery(PD) charging and QuickCharge(QC) charging.

AC Adapter Mode

Charging starts when this product is connected to an outlet and the cable is plugged into each port.
While charging the device, part of the power is used to restore power to the product.When this product is storing power, the remaining power LED blinks showing the remaining charge.

qi Wireless Charger Mode

Press the power button and turn on the power (green light on).
Place the wireless-enabled device on the ((qi)) mark as shown above to start wireless charging (the red light will turn on)

Wireless power output is available from 5W to 15W.

Note: Wireless charging will not be charged properly if this product and the device are out of alignment.
If the phone has metal or other decorative components such as a smartphone case, the foreign object detection function will be activated and the qi charge LED status light will blink red.

This product can be used with devices that support wireless charging.List of Wireless Charging (qi) enabled devices (CIO Support Page)
https://connectinternationalone.co.jp/news/cio-qi-products
You can find out which devices are compatible with wireless charging on the support page above.

■How to charge SuperMobileCharger

Using the Plug



Take out the foldable plug and connect it to the outlet as shown in the left to start charging the battery. While the power is being stored, the LED indicates the remaining charge and blinks.

*Sparks may fly when you plug it into an outlet with the power turned on, but this is not a problem because the power is already being supplied. Please turn the power off and plug it into an outlet to suppress sparks.



The power can be supplied to the product by plugging the USB Type-C cable into the product via the AC adapter. It is possible to store power* faster than when connecting to an outlet.

*When using a QC or PD compatible charger and cable

8.Warranty

Thank you for purchasing CIO product. If the product has any defects such as initial malfunction, please contact us before reviewing.
We will replace it as an initial malfuntion product.
In case of malfunction occurred within the warranty period or correct use, we will also replace it.

Invoice/warranty or dealer'a receipt will become warranty so please keep it. The product will be guaranteed for replacement with it.

Please note that we do not accept returns or refunds.

Please note that the warranty cannot be provided in the following cases.

1. **Accident due to careless handling while using it. (e.g. dropping,submerging and so on.)**
2. **Failure due to any internal modification by the user.**
3. **Failure due to fire or water damage.**

8.Warranty

Support Information

Email address: smartcoby@connectinternationalone.co.jp

Warranty【CIO-SC2-10000】
Dealer's Name

The date of purchase: