02_23.05.10

SMARTCOBY Pro CABLE

SMARTCOBYPRO-35W-CABLE



取扱説明書

1. はじめに

お買い上げありがとうございます。ご使用の前に「取扱説明書」をよくお読みの上、正しくお使いください。

もくじ

1. はじめに ………… 2
2. 注意事項 ………… 3-5
3. 付属品 ………… 6
4. 仕様 ………… 6
5. 対応急速充電規格 ………… 6
6. 各部名称 ………… 7
7. 使用方法 ………… 8-12
8. 製品保証 ………… 13-14

2.注意事項

⚠警告 死亡や重傷に結びつく恐れがある内容です。

⚠注意 重傷を負う可能性及び、物的損害に結びつく恐れがある内容です。

⚠ 警告

- 本製品が異音や異常な発熱、異臭、異物が入った場合は直ちに使用を中止してください。
- 分解及び改造は絶対に行わないでください。火災・感電・怪我の原因となります。
- お子様だけでご使用、幼児の手の届くところで使用しないでください。
- 本製品を水につけたり、濡らさないようにしてください。発熱・発火・火災・感電・破裂などの原因となります。
- 高温となる場所での使用、放置、保管は避けてください。また火の中へ投入しないでください。
- 本製品を落としたり、重いものを上にのせたり、衝撃をあたえないでください。感電・故障・怪我の原因となります。
- 電源プラグは、家庭用コンセントに奥までしっかりと差し込みご使用ください。差し込みが不十分だと、接触不良などによって火災や感電の原因となります。
- 本製品は熱を発する装置から離して使用してください。

⚠ 注意

- 本来の用途以外に使用しないでください。
- 本製品を引火性のある油、化学薬品、可燃性のものの近くで使用しないでください。
- 本製品は防水構造ではありません、水などの液体がかからない場所での使用・保存をしてください。
- 本製品を使用するときは、USBコネクタの形状を確認し正しい向き、方向で挿入してください。無理な挿入は故障・怪我の原因となります。
- 本製品にデバイス機器を接続する場合は、必ずデバイス機器の注意事項・マニュアルに従って正しくご使用ください。
- 本製品を充電中、使用中は本製品が熱くなる場合がございますので取り扱いにご注意ください。またデバイスが満充電、本製品が満蓄電に近づくにつれ、通常の温度に戻ります。
- PowerDelivery(PD)充電を行う際は、PD対応デバイス機器に対し、PD対応ケーブルをご使用いただく必要がございます。
- 着脱用の充電ケーブルは本製品専用の着脱対応充電ケーブルをご使用ください。専用充電ケーブル以外での使用による破損・損傷は保証対象外となります。

⚠ 注意

- 着脱用の充電ケーブルは無理な力を加えず着脱してください。無理な力を加えると破損・損傷の原因となります。
- 本製品を使用して接続された機器の破損・損傷・故障およびデータの消失に関して弊社では一切の責任を負いかねます。あらかじめご了承ください。
- 本製品を破棄する場合、各自治体の指示に従って廃棄してください。
- 製品仕様は改善のため予告なく変更する場合があります。そのため説明書記載の内容と異なる場合があります。
- 長時間使用しない場合は、製品寿命を保つため約3か月に1度の頻度にて充電・放電を行ってください。

3.付属品

■本製品
■着脱式充電ケーブル（USB Type-C to Type-C）または（USB Type-C to Lightning）
■取扱説明書

4.仕様

型番:	SMARTCOBYPRO-35W-CABLE
内蔵バッテリー:	リチウムイオンバッテリー
バッテリー容量:	10000mAh
入力(USB-C):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A (最大35W)
入力(USB-Cケーブル):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A (最大35W)
出力(USB-C):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A / 3.3-11V⎓3A (最大35W)
出力(USB-Cケーブル):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A / 3.3-11V⎓3A (最大35W)
出力(Lightningケーブル):	5V⎓3A / 9V⎓3A / 12V⎓1.5A / 15V⎓2A (最大30W)
合計出力(USB-C+ケーブル):	合計15W
製品サイズ:	約66×83×26.3mm
重量:	約198g(着脱式ケーブル含む)
サイクル回数:	約500回
蓄電時間:	約90分

5.対応急速充電規格

PD3.0 / PPS

6.各部名称

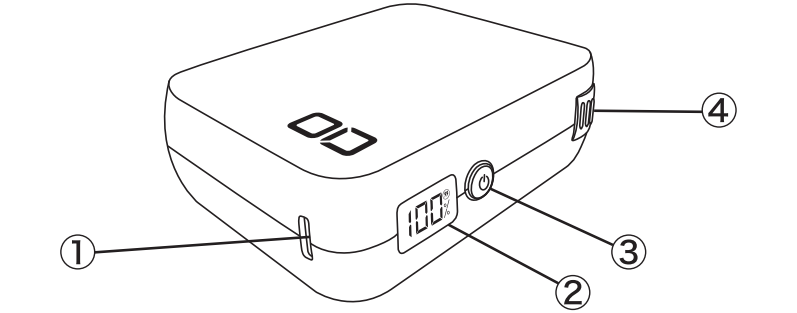

①USB Type-C 入出力ポート
②バッテリー残量数値LED(％表示)
　急速充電・急速蓄電時に ⚡ が点灯
③電源ボタン
　低電流モード　ON：約3秒長押し　OFF：約3秒長押し
　低電流モード時、電源ボタンを1回押下で残量確認
　電源ボタンを2回早押しで給電OFF
④SMARTCOBY Pro CABLE専用着脱式充電ケーブル

※本製品専用の着脱式充電ケーブル(USB Type-C to Type-Cまたは USB Type-C to Lightning)をご使用ください。専用充電ケーブル以外での使用による破損・損傷は保証対象外となります。

7.使用方法

■デバイスへの充電方法

着脱式充電ケーブルまたは本体側面のUSB Type-Cポートに充電ケーブルを使用して、本製品とデバイスを接続し充電を行います。自動的に充電が始まらない場合は、本製品側面にある「電源ボタン」を押してください。



※急速充電(PowerDelivery)を行うためには、急速充電に対応したデバイスと、急速充電に対応した充電ケーブルが必要となります。

※着脱式充電ケーブルは急速充電に対応しています

※急速充電時は本製品側面の急速充電表示 ⚡ が点灯します。

※急速充電に対応しているデバイスでも機種によっては急速充電表示 ⚡ が点灯しない場合がございます。

■2台同時充電方法

着脱式充電ケーブルと本体側面のUSB Type-Cポートの両方を使用して、本製品とデバイスを接続し充電を行います。自動的に充電が始まらない場合は、本製品の側面にある「電源ボタン」を押してください。



※2台同時充電時は急速充電は無効になります。
※2台同時充電時は合計 約15Wを各デバイスに振り分けて充電を行います。

■パススルー充電方法

USB充電器から本製品を介して、デバイスと本製品を充電します。パススルー充電時はデバイス側が優先して充電され、その後本製品に充電されます。



※パススルー充電時は急速充電・蓄電は無効になります。
※パススルー充電は通常の充電・蓄電よりも時間を要します。
※パススルー充電は着脱式ケーブル側(USB Type-C to Type-C)とUSB-Cポート側の両方に対応しています

■本製品への蓄電方法

着脱式充電ケーブル(USB Type-C to Type-C)もしくは本体側面のUSB Type-CポートのいずれかとUSB充電器を接続します。
本製品に接続後、バッテリー残量数値LEDが100%で満充電となります。





※急速蓄電時は本製品側面の急速充電表示 ⚡ が点灯します。

※最大35Wの蓄電を行うためには、35W出力に対応したUSB充電器が必要となります。USB充電器はCIO製品を推奨いたします。

※着脱式充電ケーブルと、USB Type-Cからの同時充電には対応しておりません。

※USB Type-C to Lightningケーブルでは本製品へ蓄電できません。

■低電力モードについて

低電流モードとは、Bluetoothイヤホンやウェアラブルデバイスなど、充電電流の低い小型デバイスに安定した電流を給電できるモードです。
低電流モードへの切り替えは、電源ボタンを約3秒長押ししてください。
低電流モードに切り替わると、バッテリー残量数値LEDが「--」と表示されます。
低電流モード中に、電源ボタンを1度押下することで、現在のバッテリー残量数値が表示されます。低電流モードの解除は、電源ボタンを約3秒長押ししてください。



【低電流モード】



※低電流モードは約4時間で自動的に解除されます。
※デバイスによっては満充電後でも、自動的に低電流モードが解除されない場合があります。
※デバイスによっては充電できないものがあります。

■ケーブルの取り外しについて



①ケーブルを本体から引き出します



②本体の長辺と水平になるようにケーブルを持ち、本体接続部をケーブルを持っていない手の親指で押し出します



③※ご注意ください※
あまり強い力をかけると手の爪が割れる恐れがあります



④ケーブルにあまり負荷がかからないように本体側に力を入れて押し出すとケーブルが抜けます

8.製品保証

この度は株式会社CIOの製品をご購入いただき誠にありがとうございます。商品に初期不良などの不具合がある場合、レビューの前にご連絡ください。初期不良品として交換対応を実施させていただきます。
正しくご使用いただいた状態で保証期間内に発生した故障の場合も交換対応を実施させていただきます。

納品書兼保証書もしくは、販売店レシートが保証書の代わりとなりますので大切に保管してください。

※商品の保証は原則、交換対応とさせていただきます。
返品・返金は承っておりませんのでご了承ください。

以下の場合は保証を実施いたしかねますので、ご了承ください。

1. 使用上の取り扱い不注意による事故(落下や水没など)。
2. 使用者による任意での内部改造による故障。
3. 火災・水害などによる故障。

8.製品保証

■ 製品お問い合わせ窓口

https://connectinternationalone.co.jp/contact/customer/

◀ QRお問い合わせフォーム または
下記メールアドレスよりお問い合わせください。

メールアドレス customer@connectinternationalone.co.jp

保証書【SMARTCOBYPRO-35W-CABLE】
販売店名

保証期間：1 年
お買い上げ年月日：　　年　　月　　日

CIO 公式 LINEアカウント

フォローしてね！

メリット01 LINEでカスタマーサポート

故障時や使い方が分からない場合など、チャットだからスムーズ！
LINEで簡単にお問合せOK！ 是非お気軽にご利用ください。

メリット02 LINE限定クーポン

Amazonや楽天市場等でご利用いただける超お得なクーポンを
LINEでいち早く公開！ SALEや新商品の情報も盛りだくさんです！

COUPON & SALE
お得なクーポン　セール情報

QRコードでLINEの友達を追加

QRコードをスマートフォンでスキャンしてください。

CIO 公式 YouTubeアカウント

チャンネル登録してね！

メリット01 市場未公開情報ゲット！

開発中の商品情報や開発秘話などをいち早く公開！
市場未公開の商品情報をCIO社員が詳しく解説します！

メリット02 欲しい商品が見つかる！

新しくスマホやPCを買ったけどどんな充電器、製品が最適なんだろう…。
CIOの製品の特長を分かりやすく解説！あなたに合うベストな製品が見つかる！

QRコードでYouTubeのチャンネル登録

QRコードをスマートフォンでスキャンしてください。

02_23.05.10

SMARTCOBY Pro CABLE

SMARTCOBYPRO-35W-CABLE



USER MANUAL

CIO Co., Ltd.

Founded in 2017 in Osaka, Japan, CIO Co., Ltd. is a manufacturing and sales company focused on dealing with the latest gadgets and smartphone accessories. With the concept of "Delivering the latest, most exciting gadgets", the company offers its products through its e-commerce site and physical stores.
We always pay attention to the latest technology and continuously strive to develop products that increase the level of convenience for users. We offer high quality products in accordance with Japanese standards, but at the same time, we offer high cost performance as only an overseas manufacturer can.
It is our pleasure to provide convenient gadgets to our customers.

1. Introduction

Thank you for your purchase.
Please read the "USER MANUAL" carefully before use and use it correctly.

Contents

1. Introduction ………… 3
2. Precautions ………… 4-6
3. Accessories ………… 7
4. Specifications ………… 7
5. Supported Fast Charging Protocols ………… 7
6. Names of Each Part ………… 8
7. How to Use ………… 9-13
8. Warranty ………… 14-15

2.Precautions

⚠Warning This is content that could lead to death or serious injury.

⚠Caution There is a possibility of serious injury or damage to property.

⚠Warning

- Stop using this product immediately if it makes any noise, generates unusual heat, has an unusual odor, or contains a foreign object.
- Do not disassemble or modify this product in any way. It may cause a fire, electric shock or injury.
- Children should not use this product alone. Do not use this product within the reach of children.
- Do not immerse the product in water or allow it to get wet.Do not touch the power plug with a wet hand. Otherwise, it may cause heat generation, fire, fire, electric shock, or explosion.
- Please do not use, leave or store the product in a high temperature environment. Do not throw this product into fire.
- Do not drop this product, place heavy objects on it, or give it a strong shock. Failure to do so may result in electric shock, malfunctions or injuries.
- Plug the power cord into a household wall outlet when using. Failure to do so may result in fire or electric shock.
- This product should be used away from heat-generating equipment.

⚠Caution

- Do not use this product for any purpose other than its intended use.
- Do not use this product near flammable oils, chemicals or flammable materials.
- This product is not waterproof. Use and store in a place where it will not be exposed to liquids.
- When using this product, insert the shape of the USB connector in the correct orientation. Unreasonable insertion may cause malfunction or injury.
- When connecting a device to this product, be sure to follow the device's precautions and manuals to use it correctly.
- Please handle with care as this product may become hot while it is being charged or used. Also, as the device is fully charged or the product is nearing full charge, it will return to normal temperature.
- Please use the dedicated detachable charging cable for this product. Any damage or breakage caused by use of a charging cable other than the dedicated charging cable will not be covered by the warranty.

⚠Caution

- Do not apply excessive pressure to the charging cable for connection and disconnection. It may damage or break the cable.
- Please note that we are not responsible for any damage, damage, failure, or data loss of the equipment connected using this product.
- When disposing of this product, dispose of it according to the instructions of each local government.
- Product specifications are subject to change without notice for improvement. Therefore, it may differ from the contents described in the manual.
- If you do not use the product for a long time, charge and discharge it about once every three months to maintain the product life.

3. Accessories

■SMARTCOBYPRO-35W-CABLE
■Detachable Charging Cable(USB Type-C to Type-C or USB Type-C to Lightning)
■User's Manual

4. Specifications

Model:	SMARTCOBYPRO-35W-CABLE
Built in Battery:	Lithium-ion battery
Battery Capacity:	10000mAh
Input(USB-C):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A (MAX 35W)
Input (USB-C Cable):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A (MAX 35W)
Output(USB-C):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A / 3.3-11V⎓3A (MAX 35W)
Output(USB-C Cable):	5V⎓3A / 9V⎓3A / 12V⎓2.5A / 15V⎓2.33A / 3.3-11V⎓3A (MAX 35W)
Output(Lightning Cable):	5V⎓3A / 9V⎓3A / 12V⎓1.5A / 15V⎓2A (MAX 30W)
Total Output (USB-C+Cabel):	Total 15W
Size:	Approx. 2.59 x 3.26 x 1.03 inch
Weight:	Approx. 6.98oz (Includiing detachable charging cable)
Lifecycle:	500 times
Time to Recharge:	Approx. 90 min

5. Supported Fast Charging Protocols

PD3.0 / PPS

6. Names of Each Part

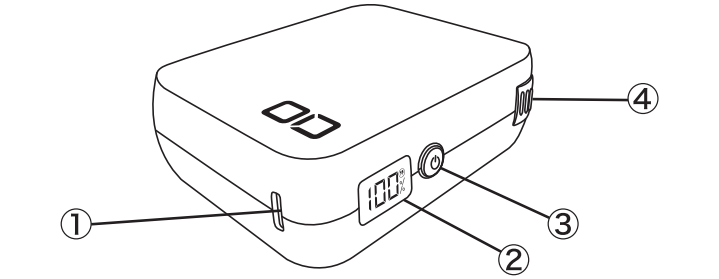

①USB Type-C Input/Output Port
②Remaining Power LED in %
⚡ lights up during fast charging and fast recharging
③Power Button
Low Current Mode
ON/OFF: Press & Hold the button for 3 seconds.
In low current mode, press the power button once to check remaining power.
Quickly press the power button twice to turn off the power supply.
④**Detachable charging cable for SMARTCOBY Pro CABLE**
*Please use the detachable charging cable (USB Type-C or Lightning) exclusively for this product.
Any damage or breakage caused by using a charging cable other than the dedicated charging cable is not covered by the warranty.

7. How to Use

■ How to Charge the Device

Connect this product to the device using the detachable charging cable or the charging cable to the USB Type-C porton the side of the main unit to charge the device. If charging does not start automatically, press the power button on the side of the product.



*For fast charging (PowerDelivery), a device that supports fast charging and a charging cable that supports fast charging are required.

*Detachable charging cable supports fast charging.

*The remaining battery LED on the side of the product shows ⚡ during fast charging.

*Even for devices that support fast charging, depending on the model of the device being used, the quick charging indicator ⚡ may not light up.

■ How to Charge Two Devices Simultaneously

Use both the detachable cable and the USB Type-C port to connect the product to the device for charging.
If the charging does not start automatically, press the " Power Button" on the side of the product.



*Fast charging is disabled when two devices are charged at the same time.
*When charging two devices simultaneously, a total of approximately 15W is allocated.

■ How to Use Pass Through Charging

Connecting a USB charger and this product, and this product and the device, enables charging of both the device and this product.
During pass-through charging, the device is charged first, and then charging to the product begins.



*Fast charging to devices and products is disabled during pass-through charging.
*Pass-through charging takes longer than normal charging to devices and products.
*Pass-through charging is compatible with both detachable cables and USB-C port.

■ How to Recharge SMARTCOBY Pro CABLE

Connect the USB charger to either the detachable charging cable (USB Type-C) or the USB Type-C port on the side of the product.
After connecting to the product, the battery status LED will show 100% when the battery is fully charged.





*The quick charge indicator ⚡ lights up during quick recharing.
*A USB wall charger that supports 35W output is required to recharge the battery up to 35W.
*Charging from USB Type-C and the detachable canle is not supported.
*The Lightning version of the detachable cable cannot be used to recharge this product.

■ Low Current Mode

Low current mode is a mode that can supply a stable current to small devices with low charging current, such as Bluetooth earphones and wearable devices.

To switch to low-current mode, press and hold the power button for about 3 seconds. When the mode is switched to the low-current mode, "--" will be displayed on the remaining battery power LED.

While in low-current mode, press the power button once to display the current battery level. To cancel the low-current mode, press and hold the power button for about 3 seconds.



【Low Current Mode】



*Low current mode will be automatically cancelled in about 4 hours.
*Depending on the device, the low-current mode may not be automatically deactivated even after a full charge.
*Some devices may not be able to be charged.

■ How to remove the cable



①Pull the cable out from the product



②Hold the cable horizontally by the long side of the product and push out the main unit connection with the thumb that is not holding the cable.



③*Please note that applying too much pressure may crack your fingernails.



④The cable can be detached by pushing it out with force on the main unit so that not too much pressure is given to the cable.

8.Warranty

Thank you for purchasing CIO product. If the product has any defects such as initial malfunction, please contact us before reviewing.
We will replace it as an initial malfuntion product.
In case of malfunction occurred within the warranty period or correct use, we will also replace it.

Invoice/warranty or dealer'a receipt will become warranty so please keep it. The product will be guaranteed for replacement with it.

Please note that we do not accept returns or refunds.

Please note that the warranty cannot be provided in the following cases.

1. **Accident due to careless handling while using it. (e.g. dropping,submerging and so on.)**
2. **Failure due to any internal modification by the user.**
3. **Failure due to fire or water damage.**

8.Warranty

Support Information

Email address: smartcoby@connectinternationalone.co.jp

Warranty【SMARTCOBYPRO-35W-CABLE】
Dealer's Name

The date of purchase:

CIO Co., Ltd.

Stay Updated with All the Latest News!

We will be posting information about our new crowdfunding project, new products, and special discounts.