


size 70×70

04_24_02.06



GaN65W3ポート電源タップ充電器 Polaris CUBE Built in Cable C10-PCBC67W2C1A



取扱説明書

1. はじめに

お買い上げありがとうございます。ご使用前に「取扱説明書」をよくお読みの上、正しくお使いください。

もくじ

1. はじめに	2
2. 注意事項	3-4
3. 付属品	5
4. 仕様	5
5. 各部名称	6
6. 対応急速充電規格	6
7. Nova Intelligence (電力自動振り分け機能) について	7
8. 製品保証	8-9

2. 注意事項

- 警告** 死亡や重傷に結びつく恐れがある内容です。
- 注意** 重傷を負う可能性及び、物的損害に結びつく恐れがある内容です。
- 警告**
 - 本製品が異音や異常な発熱、臭気、発熱が入った場合はすぐに使用を中止して家庭用コンセントから直ちに抜いてください。
 - 本製品が異音や異常な発熱、臭気、発熱が入った場合はすぐに使用を中止して家庭用コンセントから直ちに抜いてください。
 - 分解及び改造は絶対に行わないでください。火災・感電・怪我の原因となります。
 - お子様だけでご使用、幼児の手の届くところで使用しないでください。
 - 本製品を水につけたり、濡らさないようにしてください。また濡れた手で電源プラグに触れないでください。発熱・発火・火災・感電・破損などの原因となります。
 - 高温となる場所での使用、放置、保管は避けてください。また火の中へ投入しないでください。
 - 本製品を落としたり、重いものを上にのせたり、衝撃をあてないでください。感電・故障・怪我の原因となります。
 - 電源プラグは、家庭用コンセントに奥までしっかりと差し込みご使用ください。差し込みが不十分だと、接触不良により火災や感電の原因となります。
 - タコ足配線のご使用はおやめください。火災の原因となります。

3. 付属品

■本製品 ■取扱説明書

4. 仕様

型番:C10-PCBC67W2C1A
 AC入力:100-125VAC,50-60Hz,10A (USBの使用を問わず)
 USB入力:100V~240VAC,50-60Hz,1.5A
 AC出力:コンセントのみ Total:100~125VAC 10A 1250W Total
 AC出力:コンセント+USB Total:100~125VAC 9A 1125W Total
 USB出力:USB[C1/C2]67W:[5V=3A/9V=3A/12V=3A/15V=3A/20V=3.35A(Max 67W) PPS:3.3-11V=5A
 USB[C1/C2]45W:[5V=3A/9V=3A/12V=3A/15V=3A/20V=2.25A] PPS:3.3-11V=4.05A
 USB[C1/C2]30W:[5V=3A/9V=3A/12V=2.5A/15V=2A/20V=1.5A] PPS:3.3-11V=3A
 USB[C1/C2]20W:[5V=3A/9V=2.22A/12V=1.67A] PPS:3.3-11V=2A
 USB-A:5V=3A/9V=2A/12V=1.5A(Max 18W)
 USB[C1+C2]:65W Total
 USB[C1+A]:45W+18W(Total 63W)
 USB[C2+A]:5V=3A(Total 15W)
 USB[C1+C2+A]:45W+15W(Total 60W)
 サイズ:90×60×41.2mm(ケーブル長さ:550mm) 重量:約220g

5. 各部名称


- ①電源コード
- ②ACコンセント×2
- ③USB-Type Cポート
- ④USB-Type Aポート
- ⑤電源コード収納部

6. 対応急速充電規格

PD3.0 / PPS / QC3.0

7. Nova Intelligence (電力自動振り分け機能) について

USB-Cの2台同時充電時はデバイスの組み合わせにより
45W+20W / 30W+30W / 20W+20W など、デバイス側の電圧をもとに合計 **最大65W**内で自動的に最適な電圧に振り分けます。

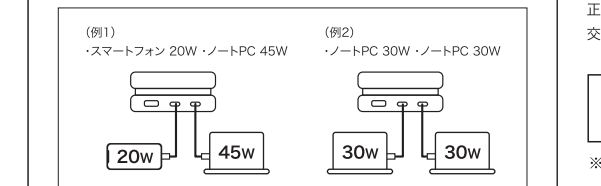

※Nova Intelligence機能はUSB-Cポートのみ対応しています。

- ※手動での電力振り分けはできません。
- ※デバイスの相性によっては最大電力にならない場合があります。
- ※PCへのPD充電は各メーカーによって必要な電圧・電流が異なりますので、詳しくは各メーカーにお問い合わせください。
- ※複数ポート同時使用にて、PCの充電が不安定な場合は、単ポートにて充電を行ってください。

8. 製品保証

この度は株式会社C10の製品をご購入いただき誠にありがとうございます。商品に初期不良などの不具合がある場合、レビューの前にご連絡ください。初期不良品として交換対応を実施させていただきます。正しくご使用いただいた状態で保証期間内に発生した故障の場合も交換対応を実施させていただきます。

納品書兼保証書もしくは、販売店レシートが保証書の代わりとなりますので大切に保管してください。

※商品の保証は原則、交換対応とさせていただきます。
 返品・返金は承っておりませんのでご了承ください。

以下の場合には保証を実施いたしかねますので、ご了承ください。

- 1. 使用上の取り扱い不注意による事故(落下や水没など)。
- 2. 使用者による任意での内部改造による故障。
- 3. 火災・水害などによる故障。

■ 製品お問い合わせ窓口

https://connectinternationalone.co.jp/contact/customer/

QRお問い合わせフォームまたは
 下記メールアドレスよりお問い合わせください。
 メールアドレス customer@connectinternationalone.co.jp

保証書【C10-PCBC67W2C1A】
 販売店名

保証期間：1年
 お買い上げ年月日： 年 月 日

COUPON & SALE

お得なクーポン セール情報

C10 公式 LINEアカウント

フォローしてね!

メリット01 LINEでカスタマーサポート
 開発中の商品情報や開発秘話などをいち早く公開!
 LINEで簡単なお問合せOK! 是非お気軽にご利用ください。

メリット02 LINE限定クーポン
 新しくスマホやPCを買ったけどどんな充電器、製品が最適なんだろう...
 LINEでいち早く公開! SALEや新商品の情報が盛りだくさんです!

QRコードでLINEの友達を追加

QRコードをスマートフォンでスキャンしてください。

QRコードでYouTubeのチャンネル登録

QRコードをスマートフォンでスキャンしてください。

C10 公式 YouTubeアカウント

チャンネル登録してね!

メリット01 市場未公開情報ゲット!
 開発中の商品情報や開発秘話などをいち早く公開!
 市場未公開の商品情報をC10社員が詳しく解説します!

メリット02 欲しい商品が見つかる!
 新しくスマホやPCを買ったけどどんな充電器、製品が最適なんだろう...
 C10の製品の特長を分かりやすく解説!あなたに合うベストな製品が見つかる!


COUPON & SALE

お得なクーポン セール情報

QRコードでLINEの友達を追加

QRコードをスマートフォンでスキャンしてください。

65W 3-Port GaN Power Strip Charger Polaris CUBE Built in Cable C10-PCBC67W2C1A

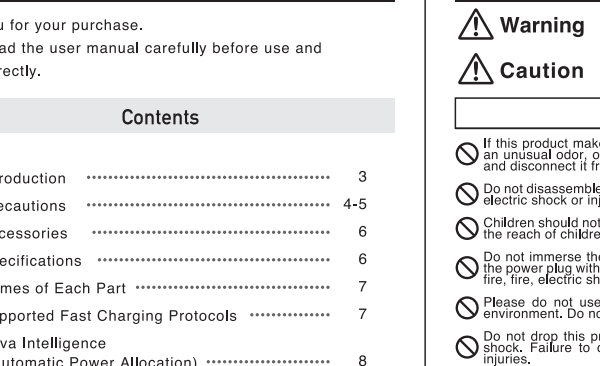

取扱説明書

1. Introduction

Thank you for your purchase.
 Please read the user manual carefully before use and use it correctly.

Contents

1. Introduction	3
2. Precautions	4-5
3. Accessories	6
4. Specifications	6
5. Names of Each Part	7
6. Supported Fast Charging Protocols	7
7. Nova Intelligence (Automatic Power Allocation)	8
8. Warranty	9-10

2.Precautions

- Warning** This is content that could lead to death or serious injury.
- Caution** There is a possibility of serious injury or damage to property.
- Warning**
 - If this product makes any unusual noise, generates abnormal heat, has an unusual odor, or contains a foreign object, stop using it immediately and disconnect it from the household outlet.
 - Do not disassemble or modify this product in any way. It may cause a fire, electric shock or injury.
 - Children should not use this product alone. Do not use this product within the reach of children.
 - Do not immerse the product in water or allow it to get wet. Do not touch the power plug with a wet hand. Otherwise, it may cause heat generation, fire, electric shock, or explosion.
 - Please do not use, leave or store the product in a high temperature environment. Do not throw this product into fire.
 - Do not drop this product, place heavy objects on it, or give it a strong impact. Failure to do so may result in electric shock, malfunctions or injuries.
 - Plug the power cord into a household wall outlet when using. Failure to do so may result in a malfunction.
 - Please note that we are not responsible for any damage, breakage, breakdown or loss of data on devices connected to this product.
 - Do not use this product overloaded. It may result in fire.


3.Accessories

■C10-PCBC67W2C1A ■User Manual

4.Specifications

C10-PCBC67W2C1A
 AC Input:100-125VAC,50-60Hz,10A (For AC socket used, USB ports with or without load)
 USB Input:100~240VAC,50-60Hz,1.5A
 AC output:AC only Total:100~125VAC 10A 1250W Total
 AC output:AC+USB Total:100~125VAC 9A 1125W Total
 USB output:USB[C1/C2]67W:[5V=3A/9V=3A/12V=3A/15V=3A/20V=3.35A(Max 67W) PPS:3.3-11V=5A
 USB[C1/C2]45W:[5V=3A/9V=3A/12V=3A/15V=3A/20V=2.25A] PPS:3.3-11V=4.05A
 USB[C1/C2]30W:[5V=3A/9V=3A/12V=2.5A/15V=2A/20V=1.5A] PPS:3.3-11V=3A
 USB[C1/C2]20W:[5V=3A/9V=2.22A/12V=1.67A] PPS:3.3-11V=2A
 USB-A:5V=3A/9V=2A/12V=1.5A(Max 18W)
 USB[C1+C2]:65W Total
 USB[C1+A]:45W+18W(Total 63W)
 USB[C2+A]:5V=3A(Total 15W)
 USB[C1+C2+A]:45W+15W(Total 60W)
 Size: 90 × 60 × 41.2mm(Cable length: 550mm) Weight: Approx. 220g

5. Names of Each Part

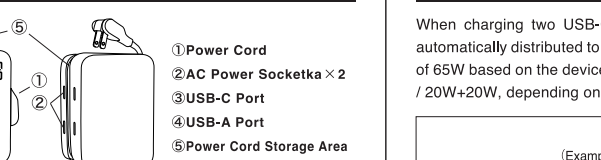

*How to store cables




6.Supported Fast Charging Protocols

PD3.0 / PPS / QC3.0

7.Nova Intelligence (Automatic Power Allocation)

When charging two USB-C devices simultaneously, the power is automatically distributed to the optimal power within a maximum total of 65W based on the device voltage, such as 45W+20W / 30W+30W / 20W+20W, depending on the device combination.

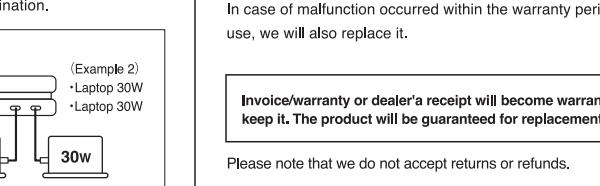

*Nova Intelligence function is only compatible with USB-C ports.

*Manual power allocation is not available.
 *Maximum power output may not be achieved depending on device compatibility.
 *The voltage and power requirements for PD charging to a PC are different for each manufacturer, so please contact the PC manufacturer for details.
 *If the PC charging is unstable when using multiple ports at the same time, please charge the device using a single port.

8.Warranty

Thank you for purchasing C10 product. If the product has any defects such as initial malfunction, please contact us before reviewing. We will replace it as an initial malfunction product.

In case of malfunction occurred within the warranty period or correct use, we will also replace it.

Invoice/warranty or dealer's receipt will become warranty so please keep it. The product will be guaranteed for replacement with it.

Please note that we do not accept returns or refunds.

Please note that the warranty cannot be provided in the following cases.

- 1. Accident due to careless handling while using it. (e.g. dropping,submerging and so on.)
- 2. Failure due to any internal modification by the user.
- 3. Failure due to fire or water damage.

Support Information

Email address: smartcoby@connectinternationalone.co.jp

Warranty【C10-PCBC67W2C1A】

Dealer's Name

The date of purchase:

Stay Updated with All the Latest News!

We will be posting information about our new crowdfunding project, new products, and special discounts.